




New energy Bearing Manufacturing Co.,...

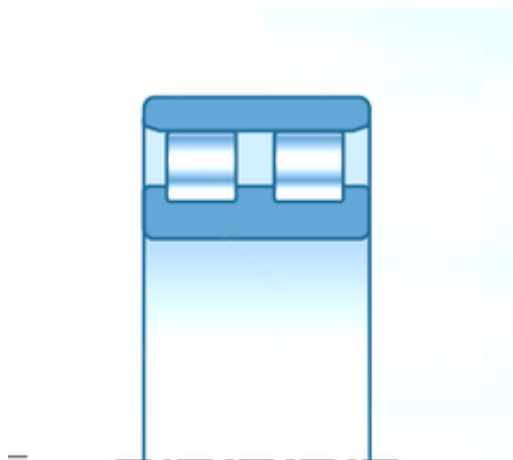

NN3024KC1NAP4 Bearing 2D drawings and 3D CAD models

120 mm x 180 mm x 46 mm NTN
NN3024KC1NAP4 cylindrical roller bearings

Bearing No. NN3024KC1NAP4

Size	120x180x46 mm
Bore Diameter	120 mm
Outer Diameter	180 mm
Width	46 mm
d	120 mm
D	180 mm
B	46 mm
C	46 mm
Category	Cylindrical Roller Bearings
Inventory	0.0
Manufacturer Name	NTN
Minimum Buy Quantity	N/A
Weight / Kilogram	3.85
EAN	0692314440827
Product Group	B04270
Bore Profile	Tapered
Cage Material	Brass
Precision Class	ABEC 7 ISO P4
Number of Rows of Rollers	Double Row
Separable	Outer Ring - Both Sides
Rolling Element	Cylindrical Roller Bearing
Profile	Complete with Outer and Inner Ring
Snap Ring	No
Internal Clearance	C1NA
Retainer	Yes



New energy Bearing Manufacturing Co.,...

Relubricatable	Yes
Inch - Metric	Metric
Other Features	3 Rib Inner Ring Plain Outer Ring Precision Bearing Cage on Inner Ring OD
Long Description	120MM Bore; Tapered Bore Profile; 180MM Outside Diameter; 46MM Width; Brass Cage Material; ABEC 7 ISO P4; Double Row; Outer Ring - Both Sides Separable; No Snap Ring; Relubricatable; C1NA Internal
Category	Cylindrical Roller Bearing
UNSPSC	31171547
Harmonized Tariff Code	8482.50.00.00
Noun	Bearing
Manufacturer URL	http://www.ntnamerica.com
Manufacturer Item Number	NN3024KC1NAP4
Weight / LBS	8.482
Outside Diameter	7.087 Inch 180 Millimeter
Width	1.811 Inch 46 Millimeter
Bore	4.724 Inch 120 Millimeter
bore diameter:	120 mm
precision rating:	ISO Class 4
outside diameter:	180 mm
maximum rpm:	3900 rpm
overall width:	46 mm
bearing material:	Hardened Alloy Steel
flanges:	(3) Inner Ring
cage material:	High Strength, 2 piece, Machined Brass
bore type:	Tapered 1:12



New energy Bearing Manufacturing Co.,...

finish/coating:	Uncoated
number of rows:	2
closure type:	Open
internal clearance:	C1NA
outer ring width:	46 mm
operating temperature range:	-40 to 120 ° C
fillet radius:	2 mm
dynamic load capacity:	233000 N
series:	NN
static load capacity:	390000 N
manufacturer product page:	Click here